

## HikCentral-Workstation/128

HikCentral-Workstation/128 is integrated with the simplified HikCentral Professional and the licenses are pre-activated. The out of box product meets versatile security challenges in small and medium security scenes in one intuitive platform: from managing individual systems such as video security, access control, intrusion alarm, etc., to collaborating multiple systems under a unified architecture. While protecting people and property, it makes daily operations more efficient, and helps various kinds of users make smarter decisions.



### Key Feature

#### Home Page

- Providing two predefined Home page modes on Web Client, including system installation and management mode, security control and management mode
- Supports customizing Home page mode on Web Client
- Supports customizing control panel on Control Client
- Supports switching Home page mode for visualization and non-visualization management
- Providing different report dashboards for resource status, access records, vacant parking spaces, alarms, etc., on the Home page of Web Client

#### Wizard

- Providing wizards for video management, access control, vehicle management, alarm detection, and time & attendance on Web Client

#### Live View and Playback

- Custom window division configurable
- Viewing maps and real-time events during live view and playback
- Stream type self-adaptive, transcoded playback, and frame- extracting playback
- Fisheye dewarping of multi-channel
- Controlling PTZ in visualization way
- Supports decoding stream from cameras with high-definition, such as PanoVu series camera

#### Visual Tracking

#### Recording and Storage

- Recording schedule for continuous recording, event recording and command recording
- Storing videos on encoding devices, Hybrid SANs, cloud storage servers
- Providing main storage and auxiliary storage
- Providing video copy-back
- Storing alarm pictures on NVRs, Hybrid SANs, cloud storage servers, or HikCentral server
- Supports search of VCA event related videos, video footages, and event triggered video footages.

#### Event and Alarm Management

- Camera linkage, alarm pop-up window and multiple linkage actions
- Multiple events for video security, access control, resource group, resource maintenance, etc.
- Supports adding combined alarms in a visualization way

## **Person and Visitor Management**

- Getting person information from added devices
- Provides multiple types of credentials, including card number, face, and fingerprint, for composite authentications
- Visitor reservation, check-in and check-out
- Supports enabling the authentication via password (PIN code) on the Web Client

## **Access Control and Video Intercom**

- Setting schedules for free access status and access forbidden status of doors
- Supports multiple access modes for both card reader authentication and person authentication
- Supports assigning an access level to persons, assigning access levels to persons, assigning access levels to person groups, and assigning access levels to an access group
- Supports advanced functions such as multi-factor authentication, anti-passback, and multi-door interlocking
- Controlling door status in real-time
- Calling indoor station by the Control Client
- Calling the platform by door station and indoor station, and answering the call by the Control Client
- Supports setting card templates and printing cards
- Supports storing access data of devices supporting ISUP to the local storage

## **Security Control**

- Real-time alarm management for added security control panels
- Adding zone as hot spot on E-map and viewing the video of the linked camera
- Event and alarm linkage with added cameras, including pop-up live view, captured picture
- Subscribing the events that the Control Client can display in real-time
- Acknowledging the received alarm on the Control Client

## **Time and Attendance**

- Setting different attendance rules for various scenarios, such as normal shift and man-hour shift
- Customizing overtime levels and setting corresponding work hour rate
- Supports assigning shift schedule to person group or person(s), or adding temporary schedule
- Supports multiple types of reports according to different needs and sending reports to specified emails regularly
- Customizing attendance reports
- Supports setting calendar types, including Gregorian Calendar, Thai Calendar and Nepali Calendar

## **Intelligent Analysis**

- Supports setting resource groups and analyzing data by different groups
- Supports intelligent analysis reports including people counting, heat analysis, and person feature analysis
- Displaying the number of people in specified regions in real-time

## **Vehicle and Parking Management**

- Managing parking lots, entrances and exits, and lanes.
- Supports linking guidance screens with parking lot for information display
- Setting entry & exit rules for registered vehicles as well as temporary vehicles
- Entrance and exit control based on license plate recognition, card, or video intercom
- Viewing real-time and history vehicle information and controlling barrier gate manually on the Control Client

## **Face and Body Recognition**

- Displaying the information of the recognized persons in real-time
- Searching history records of recognized persons, including searching in captured pictures, searching matched persons, searching by features of persons, and searching frequently or rarely appeared persons
- Supports generating movement patterns for matched persons and playing patterns on the map
- Supports setting multiple rules for dumping access records

**Temperature Screening**

- Displaying the skin-temperature and whether wearing a mask or not about the recognized persons in real time
- Triggering events and alarms when detects abnormal temperature and no mask worn
- Viewing reports about skin-surface temperature and mask-wearing

**Third-Party Integration**

- Sending the original attendance data to a third-party database (Microsoft® SQL Server, MySQL, PostgreSQL, or Oracle), thus the client can access third-party T&A and payment system
- Supports dumping access records as the CVS or TXT files to the local storage
- Supports setting table name, table fields, and mode for the third-party database

**Network Management**

- Managing network transmission devices such as switches, displaying the network connection and hierarchical relationship of the managed resources by a topology
- Viewing the network details between the device nodes in the topology, such as downstream and upstream rate, port information, etc. and checking the connection path
- Exporting the topology and abnormal data to check the device connection status and health status

## Software Specification

Features		Maximum Performance
Devices and Resources	Cameras <i>*Including up to 12 ANPR Cameras and up to 6 Cameras with Face Capture Function</i>	128
	Managed Device IP Addresses <i>*Including Encoding Devices, Access Control Devices, and Security Control Devices</i>	256
	Video Intercom Devices <i>*Including Indoor Station</i>	16
	Alarm Inputs (Including Zones of Security Control Devices)	32
	Alarm Outputs	32
	ANPR Cameras	12
	Cameras with Face Capture Function	6
	People Counting Cameras	64
	Heat Map Cameras	64
	Security Radars	2
	Areas	128
	Cameras per Area	64
	Alarm Inputs per Area	32
	Alarm Outputs per Area	32
Recording	Recording Schedule	128
	Recording Schedule Template	32
Event & Alarm	Event and Alarm Rules	128
	Storage of Events or Alarms without Pictures	10/s
	Events or Alarms Sent to Clients <i>*The clients include Control Clients and Mobile Clients.</i>	10/s 16 Clients/s
	Notification Schedule Templates	100
Picture	Picture Storage <i>*Including event/alarm pictures, face pictures, and vehicle pictures.</i>	10/s
Reports	Regular Report Rules	64
	Event or Alarm Rules in One Event/Alarm Report Rule	32
	Records in One Sent Report	10,000 or 10 MB
	Resources Selected in One Report <i>*With this limitation, you can generate a neat and clear report via the Control Client and it costs less time.</i>	20
Data Storage	Data Retention Period	Stored for 6 Months
Users and Roles	Concurrent Accesses via Web Clients and Control Clients	16
	Concurrent Accesses via Mobile Clients	16
	Users	32
	Roles	32
Vehicle (ANPR)	Vehicle Lists	50
	Vehicles per Vehicle List	500
Entrance & Exit	Lanes	12
	Cards Linked with Vehicles	2,500
	Vehicle Passing Frequency in Each Lane	1 Vehicle/s
	Entrance/Exit Station	12
Face Comparison	Persons with Profiles for Face Comparison	10,000
	Face Comparison Groups	16
	Persons in One Face Comparison Group	1,000
Access Control	Persons with Credentials for Access Control	5,000
	Visitors	5,000
	Total Credentials (Card + Fingerprint)	25,000

	Cards	25,000
	Fingerprints	20,000
	Profile Pictures	5,000
	Access Points (Doors + Outdoor Station )	16
	Access Levels	32
	Access Schedules	32
<b>Time and Attendance</b>	Persons for Time and Attendance	50,000
	Attendance Groups	32
	Persons in One Attendance Group	5,000
	Schedules	32

## Decoding Performance of Control Client

Resolution	Video Encoding Type	Recommended Bite Rate and Frame Rate	Maximum Hardware Decoding Channels	Maximum Software Decoding Channels
4CIF (704*576)	H.264	1024 kbps * 30 fps	36	31
	H.265	512 kbps * 30 fps	30	30
720P (1280*720)	H.264	2048 kbps * 30 fps	12	10
	H.265	1024 kbps * 30 fps	12	8
1080P (1920 × 1080)	H.264	4096 kbps * 30 fps	6	5
	H.265	2048 kbps * 30 fps	6	4
4 MP (2560 × 1440)	H.264	8192 kbps * 30 fps	3	2
	H.265	4096 kbps * 30 fps	3	2
6 MP (2560 × 2560) (Fisheye Camera)	H.264	12288 kbps * 30 fps	2	2
	H.265	6144 kbps * 30 fps	2	2
8 MP (3840 × 2160)	H.264	16384 kbps * 30 fps	1	1
	H.265	8192 kbps * 30 fps	1	1
12 MP (4000 × 4000) (Fisheye Camera)	H.264	16384 kbps * 20 fps	1	1
	H.265	8192 kbps * 20 fps	2	1


## Hardware Specification



<b>Processor</b>	Intel® Core™ i5-8500 (6Cores/9MB/6T/ Up to 4.1GHz/65W)
<b>Operating Systems</b>	Microsoft® Windows 10 IoT Ent (64-bit)
<b>Memory</b>	2 × 4GB 2666MHz DDR4 UDIMM
<b>Graphics Card</b>	Integrated Intel® HD Graphics 630
<b>Storage</b>	M.2 256GB SATA Class 20 solid state drive
<b>NIC</b>	Integrated Intel I219-LM Ethernet LAN 10/100/1000
<b>I/O Ports</b>	10 External USB: 1 × USB Type-C 3.1 Gen 2, 5 × 3.1 Gen 1 Type-A (1 Front, 4 Rear), 4 × USB 2.0, 1 × RJ-45, 2 × Displayport, 1 × Serial, 2 × PS/2
<b>Form Factor</b>	Small Form Factor
<b>Power Supply</b>	300W typical 90% Efficient PSU (80 PLUS Bronze)
<b>Dimensions (H × W × D)</b>	29cm × 9.26cm × 29.2cm (11.42" × 3.7" × 11.5")
<b>Weight</b>	7.57lbs / 5.26kg
<b>Certification</b>	CE, FCC, UL
<b>Warranty</b>	36 Months


### Front View

- 1- Power Button and Power Light
- 2- Hard Drive Activity Light
- 3- Headset/Universal Audio Jack Port
- 4- USB 2.0 Port with PowerShare
- 5- USB 2.0 Port
- 6- USB 3.1 Gen 2 Port with PowerShare
- 7- USB 3.1 Gen 1 Port

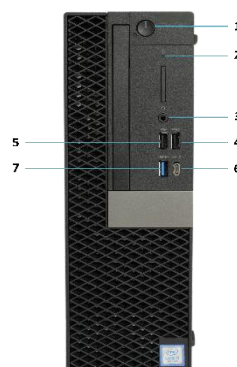

### Back View

- 1- Line-Out Port
- 2- PS/2 Keyboard Port
- 3- Serial Port
- 4- PS/2 Mouse Port
- 5- Display Ports
- 6- USB 3.1 Gen 1 Ports
- 7- USB 2.0 Ports (Supports SmartPower On)
- 8- Power Connector Port
- 9- Power Supply Diagnostic Light
- 10- Release Latch
- 11- Service Tag Label
- 12- Network Port
- 13- HDMI Port

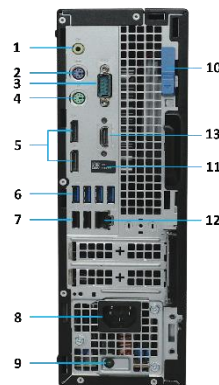

**Note:** By default, the DP to VGA adapter will be provided.

## System Requirement

\* For high stability and good performance, the following system requirements must be met.

Feature	Description
<b>OS for Control Client</b>	Microsoft® Windows 11 64-bit Microsoft® Windows 10 (64-bit) Microsoft® Windows 8.1 (32/64-bit) Microsoft® Windows 7 SP1 (32/64-bit) Microsoft® Windows Server 2022 Microsoft® Windows Server 2019 (64-bit) Microsoft® Windows Server 2016 (64-bit) Microsoft® Windows Server 2012 (64-bit) Microsoft® Windows Server 2012 R2 (64-bit) Microsoft® Windows Server 2008 R2 SP1 (64-bit) <i>*For Windows 8.1 and Windows Server 2012 R2, make sure it is installed with the rollup (KB2919355) updated in April, 2014.</i>
<b>Browser Version</b>	Chrome 100 and above Firefox 100 and above Safari 13 and above Internet Explorer 11 and above
<b>Database</b>	PostgreSQL V11.8
<b>OS for Smartphone</b>	iOS 10.0 and later Android 6.0 and above
<b>OS for Tablet</b>	iOS 10.0 and later Android tablet with Android OS version 6.0 and above

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

